


## GARBAGE BIN CARRIER



## Main Parameters

Items		FLM5030CTYCC6	FLM5070CTYQL6
GVW	kg	2840	7300
Wheelbase	mm	2990	3815
Payload Weight	kg	1230	3840
Upper Weight	kg	480	1130
Upper Transportation Dimensions	mm	3060×1580×1740	5240×1930×1850
Max Speed	km/h	100	95
Selectable Of Chassis Brand		CHANGAN/DONGFENG/FOTON	ISUZU
Quantity Of Bins	PCS	MGB120L 15 MGB240L 8 MGB660L 3	MGB240L 21 MGB660L 7
Hydraulic System Pressure	MPa	14	14
Max Lifting Ability	kg	≥300	1000
Cycle Time Of One Operation	s	≤30	≤30
Max Angle Of Rear Tailboard		90°	90°

# Technical Specification

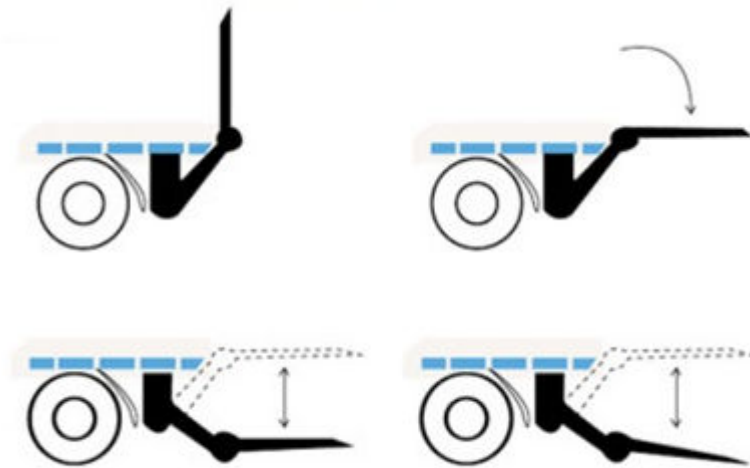

## Base Specification

### Control system:

- There are two kinds of electric control operation modes, fixed and wired, which are simple and convenient.

### Other advantages:

- Flexible shipment and large transportation range greatly expand the collection area of barreled garbage, and adopt the overall transport of garbage cans, without sewage leakage and garbage scattering.
- No additional protection is required, and the vehicle can be parked on the flat road for loading and unloading.
- The carriage adopts side turning rail plate, which is convenient for empty bucket handling and other handling methods, and improves efficiency.

### Safety:

- Several measures are taken for safety protection: independent switch is set for tailboard power supply; reflective warning board and safety chain are installed on lifting tailboard.

### Tail-board Lifting Device:

- Adopt electric control hydraulic tail plate lifting device, reduce labor intensity and work efficiency.

### Optional device:

- The garbage can positioning rod can be installed on the carriage to position the garbage can in the carriage, so as to avoid the self-sliding of the garbage can during the driving of the vehicle.
- The tailboard can be equipped with a control system for the lowering speed of the lifting tailboard, which can flexibly adjust the lowering speed of the tailboard and improve the working efficiency.
- Optional wireless remote control handle, easy to operate.
- FLM5070CTYQL6:
  - 1.High pressure cleaning system can be selected, and the vehicle and garbage can be cleaned as required.
  - 2.Can be equipped with widened car body.
  - 3.It can also be selected the tailboard provided by CADRO company, a professional manufacturer of lifting tailboard.
  - 4.Optional bolt connection material aluminum alloy side protection.